

## About us

▶ Guangdong Boshun Belting Co.,Ltd. was established in 2012, which is specialized in light duty conveyor belt production, sales, research and development. The factory covers an area of 80000 square meters in Huizhou City, with 7 most advanced conveyor belt coating production lines in China. We can produce belt width from 1500mm to 3500mm, the annual production capacity up to 6 million square meters. In order to ensure the products with better quality and competitive price, we are doing well to control the cost of each link. Now we have more than 30 units of weaving machines to weave the belt fabric by ourselves, weaving production capacity up to 6 million square meters per year. Market is the direction of our development, the quality is our lives. We see "drive the industry innovation and development" as mission, aim to create the greatest value for customers. We will continue to innovate and improve product quality system, to achieve the goal of the becoming high quality and technology-leading belting enterprise in the world.



## Quality Control

▶ Boshun Belting strictly control the quality system, each roll of conveyor belt will undergo strict temperature, hardness, tension etc testing before shipment. We ensure that each conveyor belt in the use condition of safe, non-pollution, long life, high precision, providing customers with the best quality products.



**广东博顺带业有限公司**  
GUANGDONG BOSHUN BELTING CO.,LTD.

### GUANGDONG BOSHUN BELTING CO.,LTD.

OFFICE ADDRESS: NO.8 YAYINGSHI ROAD, SCIENCE CITY, HUANGPU DISTRICT,  
GUANGZHOU, GUANGDONG, CHINA

POSTCODE:510000

FACTORY ADDRESS: TWELVE RIDGE, YANGQIAO VILLAGE, BOLUO COUNTY,  
HUIZHOU CITY, GUANGDONG, CHINA

POSTCODE:516100

TEL:0086-20-82553527

FAX:0086-20-82553873

EMAIL: info@boshunbelt.com

WEBSITE: www.boshunbelting.com

### Branch

- Jiangsu New Lianda Belting Technology Co.,Ltd.  
(Wuxi Lianda Conveyor Belt Co.,Ltd.)

Address: Wanxin Industrial Zone, Luoshe Town, Huishan  
District, Wuxi City, Jiangsu, China  
Tel: 0086-510-83302888  
Fax: 0086-510-83308789

- Foshan Persly Industrial Belt Co.,Ltd.

Address: Behind Nanzhuang Third Middle School, Xingbian  
Development Zone, Nanzhuang Town, Chancheng District,  
Foshan City, Guangdong, China  
Tel: 0086-757-82532941  
Fax: 0086-757-82532940

- Guangzhou Dingshun Electrical and Mechanical Equipment Co.,Ltd.

Address: No.8 Yayingshi Road, Science City, Huangpu District,  
Guangzhou, Guangdong, China  
Tel: 0086-20-32366372  
Fax: 0086-20-32366396

- Fujian Branch

Address: X328 Beihuan Road, Jinjiang City, Quanzhou, Fujian, China  
Tel: 0086-595-85026852  
Fax: 0086-595-85026853



**博力顺**  
BO LI SHUN

**广东博顺带业有限公司**

GUANGDONG BOSHUN BELTING CO.,LTD.

Stone & Ceramics Industry  
— Innovator of automation




Scan QR code with WeChat

# 博顺带业

Stone & Ceramics Industry  
Innovator of automation




► Boshun Belting is the leading manufacturer of conveyor belt for stone & ceramics industry. The factory covers an area of 80000 square meters in Huizhou City. As our main products, our belts have characteristics of cut-resistant, abrasion-resistant, flatness and high breaking strength, etc. We supply belts to many ceramics and marble equipment manufacturers all over the world, promoting production quality and collocation in deep cooperation. We also set up Research & Development center by self, our technical experts research and develop new productions, owns six conveyor belt industrial patents at present.

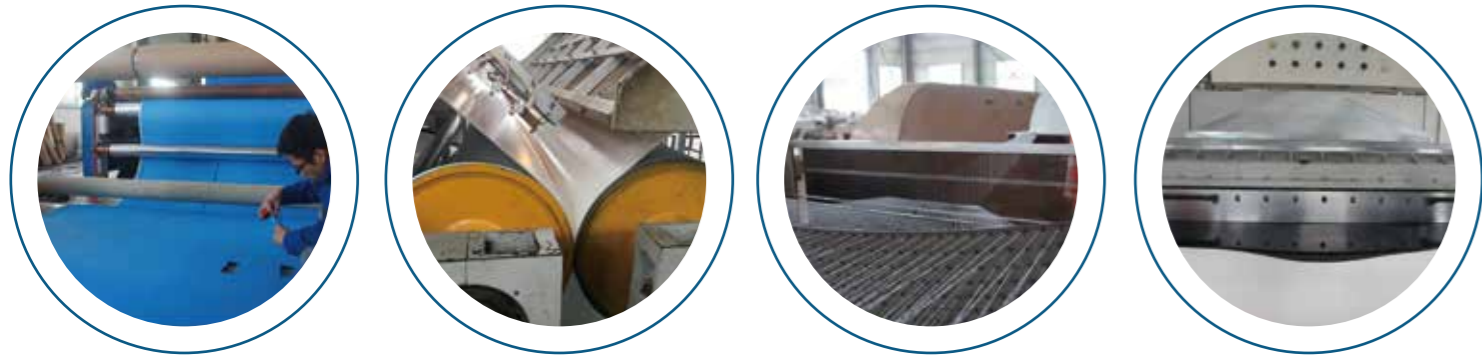

## High Quality

► Our technicians check the whole process of production. High viscosity glue make belts no stomata. Flatness. We remove bubble from PVC solution in vacuum mixer, make sure no bubble then in production. Strictly control the thickness tolerance with 0.05mm. Bottom fabric with abrasion-resistant. Working life of conveyor belt with abrasion-resistant impregnated fabric is over one year.

## Products

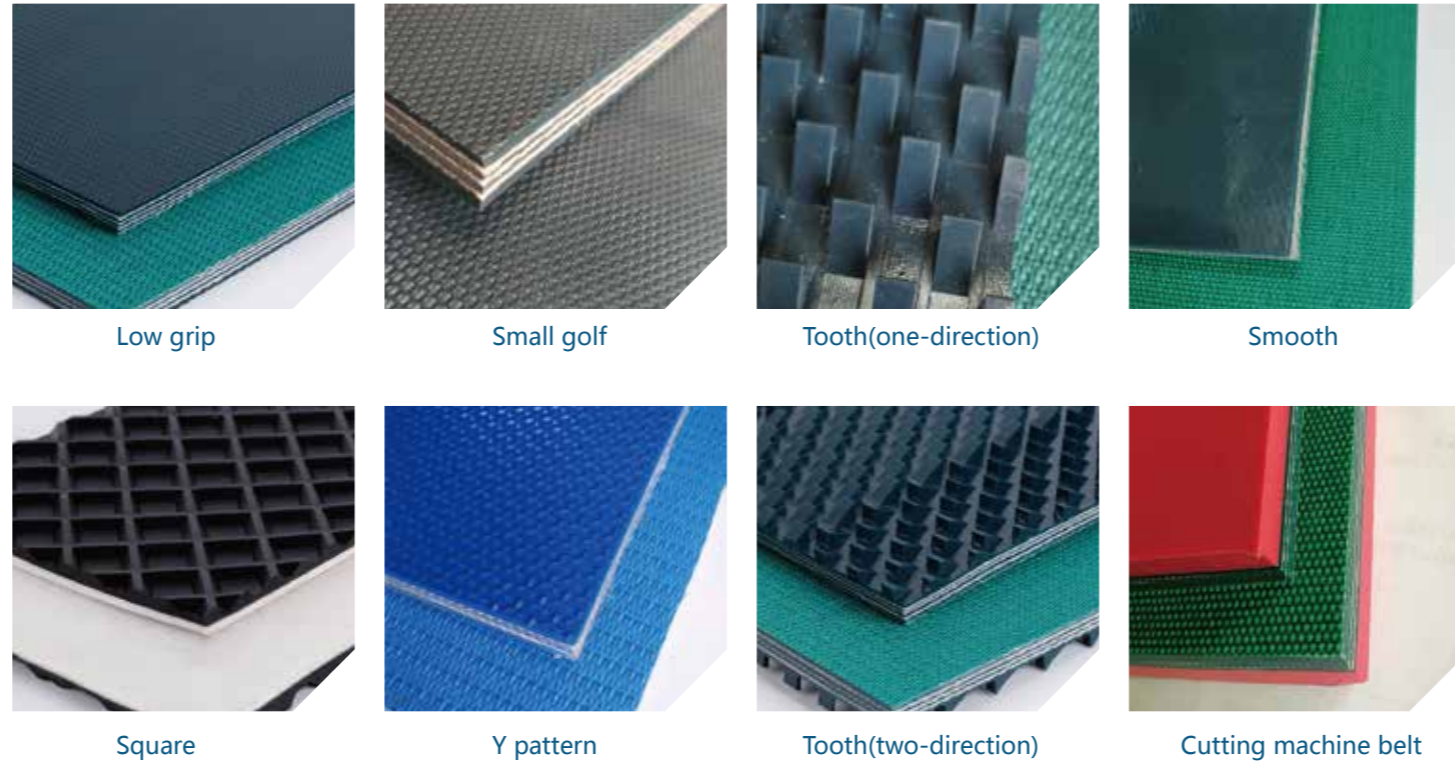

## Technical data

| Type                 | Color  | Pattern              | Thickness (mm) | Ply | Effective pull at 1% elongation (N/mm) | Min diameter (mm) | Temperature range (°C) |
|----------------------|--------|----------------------|----------------|-----|--|-------------------|------------------------|
| 70P39-28/15          | White  | Smooth/Small golf    | 7.0            | 3   | 50                                     | 350               | -15/+80                |
| 70P39-76/25          | Petrol | Low grip             | 7.0            | 3   | 50                                     | 350               | -15/+80                |
| 90P49-76             | Petrol | Smooth               | 9.0            | 4   | 70                                     | 450               | -15/+80                |
| 90P49-76/4           | Petrol | Round nipple         | 9.0            | 4   | 70                                     | 450               | -15/+80                |
| 90P32-36/13          | Black  | Square               | 9.0            | 3   | 14                                     | 120               | -15/+80                |
| 90P39-71/15          | Petrol | Small golf           | 9.0            | 3   | 70                                     | 450               | -10/+80                |
| 90P49-76/25          | Petrol | Low grip             | 9.0            | 4   | 50                                     | 450               | -15/+80                |
| 90P49-86/49          | Blue   | Y pattern            | 9.0            | 4   | 70                                     | 400               | -10/+80                |
| 120P42-74(1)/0H(RED) | Red    | Matt                 | 12.0           | 4   | 25                                     | 200               | -10/+90                |
| 130P49-76/23         | Petrol | Tooth(one-direction) | 13.0           | 4   | 70                                     | 450               | -15/+80                |
| 130P49-76/34         | Petrol | Tooth(two-direction) | 13.0           | 4   | 70                                     | 450               | -15/+80                |
| 130P49-86/34         | Blue   | Tooth(two-direction) | 13.0           | 4   | 70                                     | 450               | -15/+80                |

## Polyurethane Belt

► We have two production lines in PERSLY brand for polyurethane belt and they are available with green rough, red smooth and reinforced. The diameter range from 2mm to 22 mm. Customized is available.  
Tolerances of round belts  
diameter < 15mm : ±0.3mm  
diameter > 15mm: ±0.5mm  
Tolerances of V belts  
Width: ±0.5mm  
Height: ±0.5mm  
Standard hardness: 85 shoreA



## PU Timing Belt

► We have two production lines in PERSLY brand for Timing Belts. Timing belts are manufactured in thermoplastic polyurethane, that gives superior wear and abrasion resistance, steel cord offer good running characteristics with high tractive loads.

