



GUANGDONG BOSHUN BELTING CO.,LTD.

博力顺
BO LI SHUN

Product Data Sheet

Type: 50P22-26/11A

| |
|-------------------------------|
| Main industry segments |
| Food |

| |
|------------------------------|
| Applications |
| Poultry, Sea food processing |

| |
|-------------------|
| Color code |
| RAL 9003 |




| | |
|--------------------------|--------------------------|
| Product structure | |
| Top cover | |
| -Thickness | 3.2 mm |
| -Material | Polyvinyl chloride (PVC) |
| -Features | Incline conveying |
| -Color | White |
| -Surface | Crescent |
| -Hardness | 65° ShoreA |
| Bottom cover | |
| -Thickness | 0.5 mm |
| -Material | Polyester monofilament |
| -Features | Lateral stability |
| -Color | - |
| -Surface | Rigid fabric |
| -Hardness | - |

| | |
|---------------------------------|-----------------------|
| Technical data | |
| Total thickness | 5.0 mm |
| Number of plies | 2 |
| Weight | 4.8 kg/m ² |
| Maximum width | 2000 mm |
| Effective pull at 1% elongation | 10 N/mm |
| Twisting force | 16 N/mm |
| Maximum admissible tension | 18 N/mm |
| Breaking strength | 180 N/mm |
| Temperature range | -15 °C ~ +80 °C |

| | |
|------------------------------|--------|
| Minimum roll diameter | |
| Normal flexion | 60 mm |
| Counter flexion | 120 mm |

| | | | |
|-----------------------|-----|-----------------|----|
| Characteristic | | | |
| Slide | Yes | Flame retardant | No |
| Roller | Yes | Cold resistant | No |
| Trough | No | Knife edges | No |
| Antistatic | No | Curves | No |
| Oil and fat resistant | No | Guides | No |
| FDA | No | Cleats | No |
| Low noise | No | Sidewalls | No |

Product photos

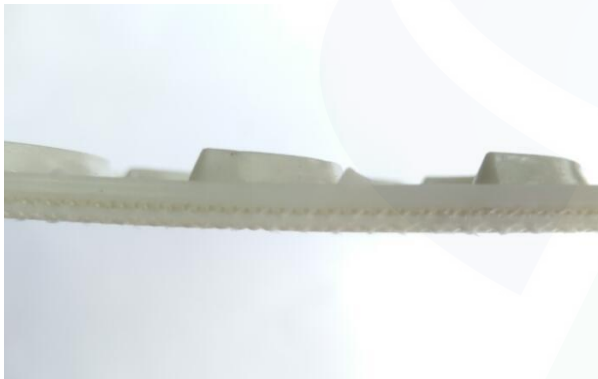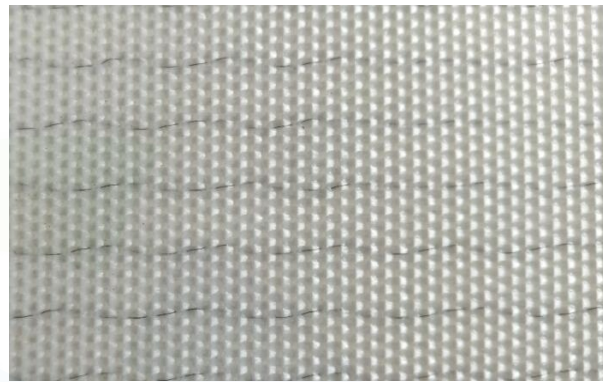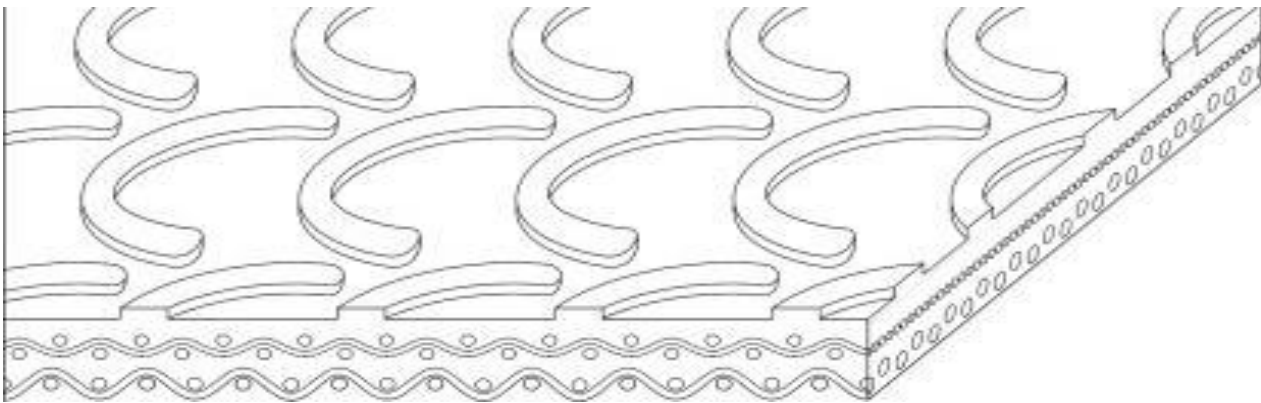

Joining methods

Double finger

Disclaimer

All data are approximate values and defined under the following standard climatic conditions. 23 °C, 50 % relative humidity (ISO 554).

All informations are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. Due to the fact that Boshun Belting has no control of use, we will not assume any liability concerning the suitability and process ability of the products mentioned herein. This also applies to defects, damages, consequential damages, and other consequences

Issued: 2018.12.20

Last update: 2018.12.29