



GUANGDONG BOSHUN BELTING CO.,LTD.

**博力顺**  
BO LI SHUN

## Product Data Sheet

Type: 70P39-76/25

<b>Main industry segments</b>
Stone & Ceramics

<b>Applications</b>
Ceramics polishing

<b>Color code</b>
RAL 5020






<b>Product structure</b>	
<b>Top cover</b>	
-Thickness	2.0 mm
-Material	Polyvinyl chloride (PVC)
-Features	Low friction
-Color	Petrol
-Surface	Low grip
-Hardness	70° ShoreA
<b>Bottom cover</b>	
-Thickness	1.0 mm
-Material	Polyester multifilament
-Features	Flexible, Heavy construction
-Color	Green
-Surface	Impregnated fabric
-Hardness	-

<b>Technical data</b>	
Total thickness	7.0 mm
Number of plies	3
Weight	8.2 kg/m <sup>2</sup>
Maximum width	3000 mm
Effective pull at 1% elongation	50 N/mm
Twisting force	80 N/mm
Maximum admissible tension	75 N/mm
Breaking strength	750 N/mm
Temperature range	-15 °C ~ +80 °C

<b>Minimum roll diameter</b>	
Normal flexion	350 mm
Counter flexion	450 mm

<b>Characteristic</b>			
Slide	Yes	Flame retardant	No
Roller	Yes	Cold resistant	No
Trough	No	Knife edges	No
Antistatic	No	Curves	No
Oil and fat resistant	No	Guides	Yes
FDA	No	Cleats	Yes
Low noise	No	Sidewalls	Yes

## Product photos

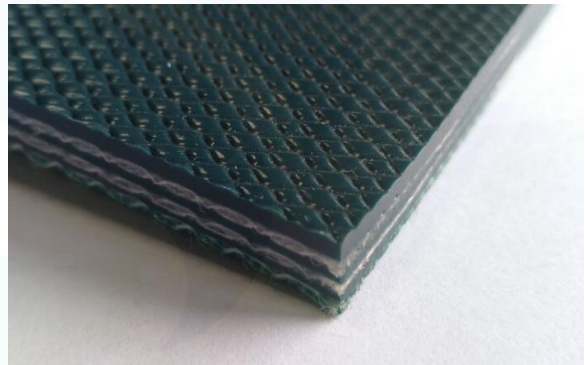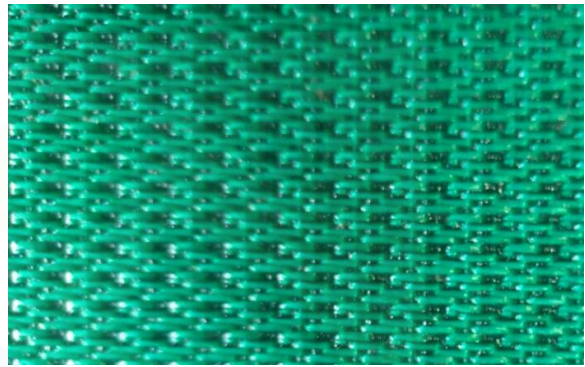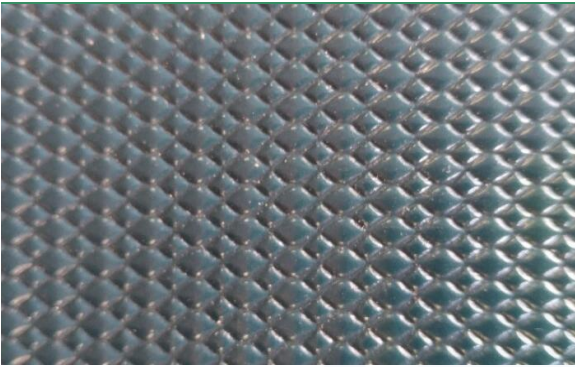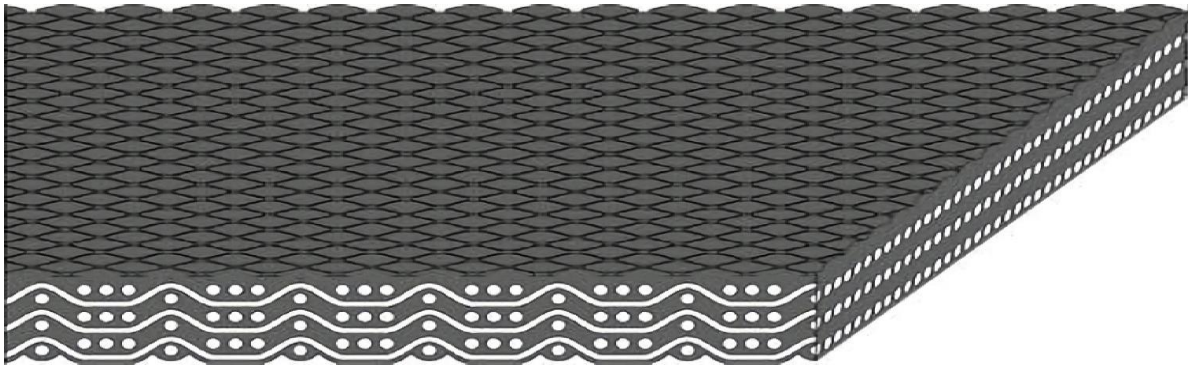

## Joining methods

long skived stepped joint	Yes
---------------------------	-----

## Disclaimer

All data are approximate values and defined under the following standard climatic conditions. 23 °C, 50 % relative humidity (ISO 554).

All informations are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. Due to the fact that Boshun Belting has no control of use, we will not assume any liability concerning the suitability and process ability of the products mentioned herein. This also applies to defects, damages, consequential damages, and other consequences

Issued: 2018.12.7

Last update: 2019.01.02