



GUANGDONG BOSHUN BELTING CO.,LTD.

**博力顺**  
BO LI SHUN

## Product Data Sheet

Type: 130P49-76/34

<b>Main industry segments</b>
Stone & Ceramics

<b>Applications</b>
Marble-polishing

<b>Color code</b>
RAL 5020





<b>Product structure</b>	
<b>Top cover</b>	
-Thickness	6.5 mm
-Material	Polyvinyl chloride (PVC)
-Features	-
-Color	Petrol
-Surface	Tooth(two-direction)
-Hardness	70° ShoreA
<b>Bottom cover</b>	
-Thickness	1.0 mm
-Material	Polyester multifilament
-Features	Flexible, Heavy construction
-Color	Green
-Surface	Impregnated fabric
-Hardness	-

<b>Technical data</b>	
Total thickness	13.0 mm
Number of plies	4
Weight	11.1 kg/m <sup>2</sup>
Maximum width	2200 mm
Effective pull at 1% elongation	70 N/mm
Twisting force	112 N/mm
Maximum admissible tension	100 N/mm
Breaking strength	1000 N/mm
Temperature range	-15 °C ~ +80 °C

<b>Minimum roll diameter</b>	
Normal flexion	450 mm
Counter flexion	500 mm

<b>Characteristic</b>			
Slide	Yes	Flame retardant	No
Roller	Yes	Cold resistant	No
Trough	No	Knife edges	No
Antistatic	No	Curves	No
Oil and fat resistant	No	Guides	No
FDA	No	Cleats	No
Low noise	No	Sidewalls	No

## Product photos

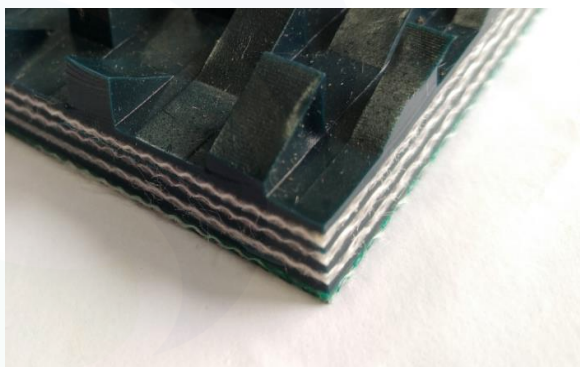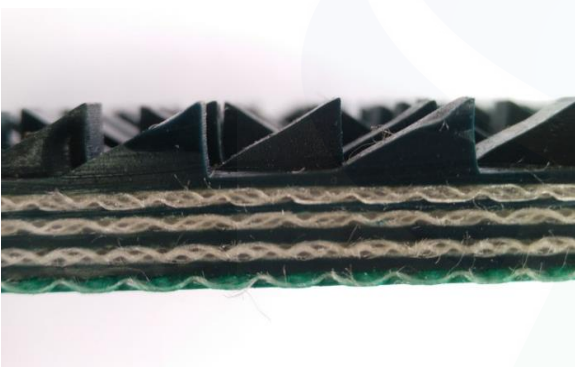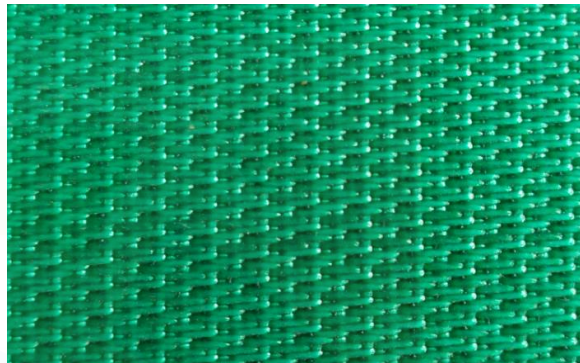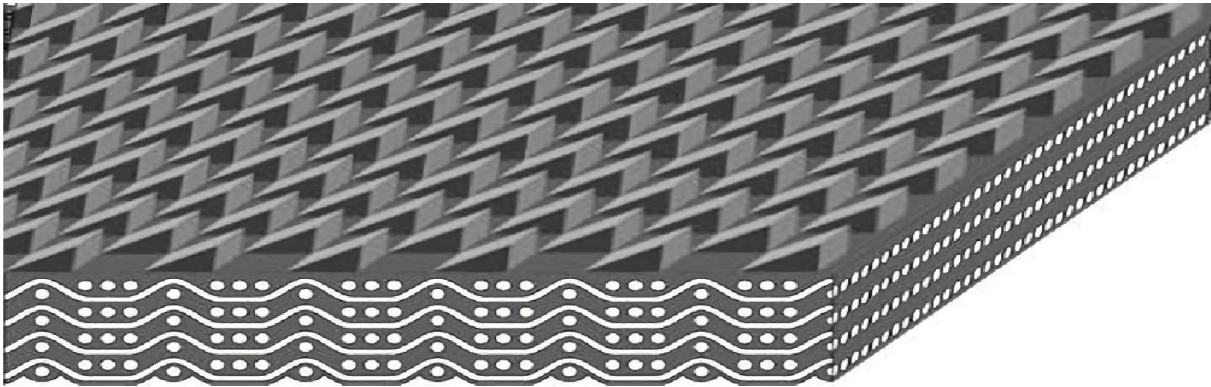

## Joining methods

Long skived stepped

## Disclaimer

All data are approximate values and defined under the following standard climatic conditions. 23 °C, 50 % relative humidity (ISO 554).

All informations are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. Due to the fact that Boshun Belting has no control of use, we will not assume any liability concerning the suitability and process ability of the products mentioned herein. This also applies to defects, damages, consequential damages, and other consequences

Issued: 2019.03.20

Last update: 2019.03.20