



GUANGDONG BOSHUN BELTING CO.,LTD.

**博力顺**  
BO LI SHUN

## Product Data Sheet

Type: 20P25-84N FDA

<b>Main industry segments</b>
Food

<b>Applications</b>
-

<b>Color code</b>
RAL 5015





<b>Product structure</b>	
<b>Top cover</b>	
-Thickness	0.5 mm
-Material	Polyvinyl chloride (N-PVC FDA)
-Features	Smooth, Oil and fat resistant, FDA
-Color	Blue
-Surface	Smooth
-Hardness	65° ShoreA
<b>Bottom cover</b>	
-Thickness	0.5 mm
-Material	Polyester monofilament
-Features	Lateral stability, Light construction
-Color	-
-Surface	Rigid fabric
-Hardness	-

<b>Technical data</b>	
Total thickness	2.0 mm
Number of plies	2
Weight	2.4 kg/m <sup>2</sup>
Maximum width	3500 mm
Effective pull at 1% elongation	8 N/mm
Twisting force	12.8 N/mm
Maximum admissible tension	15 N/mm
Breaking strength	150 N/mm
Temperature range	-10 °C ~ +90 °C

<b>Minimum roll diameter</b>	
Normal flexion	30 mm
Counter flexion	60 mm

<b>Characteristic</b>			
Slide	Yes	Flame retardant	No
Roller	Yes	Cold resistant	No
Trough	No	Knife edges	No
Antistatic	No	Curves	No
Oil and fat resistant	Yes	Guides	Yes
FDA	Yes	Cleats	Yes
Low noise	No	Sidewalls	Yes

## Product photos

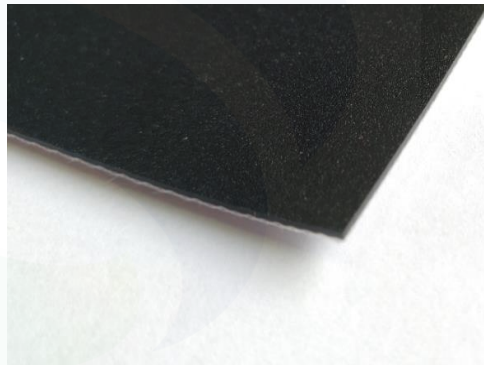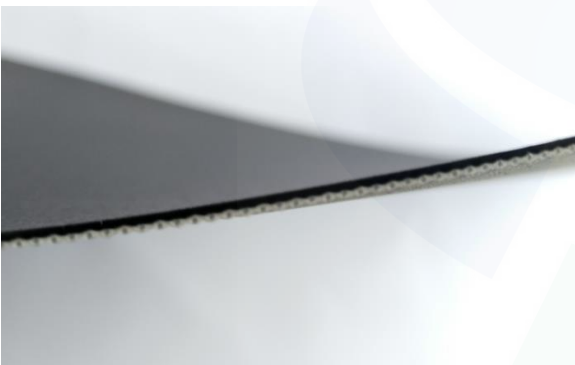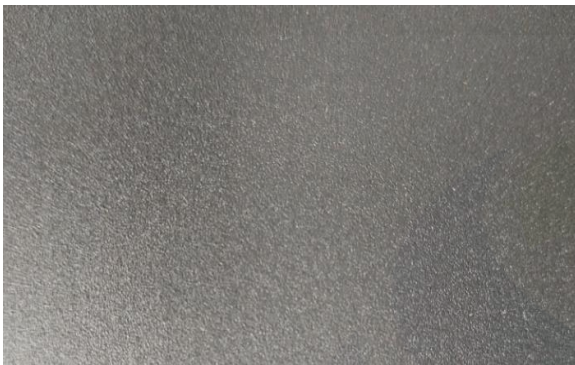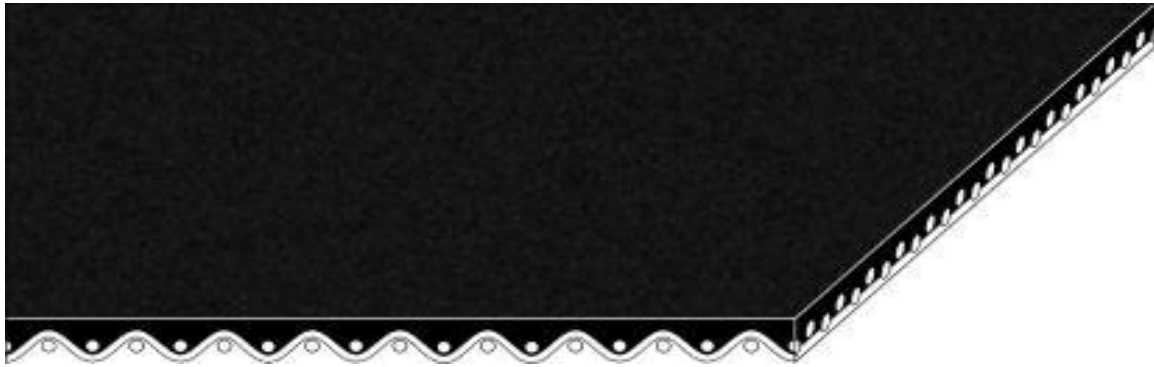

## Joining methods

Double-finger

## Disclaimer

All data are approximate values and defined under the following standard climatic conditions. 23 °C, 50 % relative humidity (ISO 554).

All informations are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. Due to the fact that Boshun Belting has no control of use, we will not assume any liability concerning the suitability and process ability of the products mentioned herein. This also applies to defects, damages, consequential damages, and other consequences

Issued: 2019.03.20

Last update: 2019.03.20