



GUANGDONG BOSHUN BELTING CO.,LTD.

博力顺  
BO LI SHUN

## Product Data Sheet

Type: 14U23-17B

Main industry segments
Food

Applications
-

Color code
RAL 6019




Product structure	
<b>Top cover</b>	
-Thickness	0.5 mm
-Material	Polyester/cotton
-Features	Non-adhesive
-Color	-
-Surface	Cotton
-Hardness	-
<b>Bottom cover</b>	
-Thickness	0.5 mm
-Material	Polyester/cotton impregnated PU
-Features	Non-adhesive
-Color	Green
-Surface	Cotton
-Hardness	-

Technical data	
Total thickness	1.4 mm
Number of plies	2
Weight	1.7 kg/m <sup>2</sup>
Maximum width	3000 mm
Effective pull at 1% elongation	8 N/mm
Twisting force	12.8 N/mm
Maximum admissible tension	15 N/mm
Breaking strength	150 N/mm
Temperature range	-20 °C ~ +80 °C

Minimum roll diameter	
Normal flexion	8 mm
Counter flexion	15 mm

Characteristic			
Slide	Yes	Flame retardant	No
Roller	Yes	Cold resistant	No
Trough	No	Knife edges	No
Antistatic	No	Curves	No
Oil and fat resistant	Yes	Guides	No
FDA	Yes	Cleats	No
Low noise	No	Sidewalls	No

## Product photos

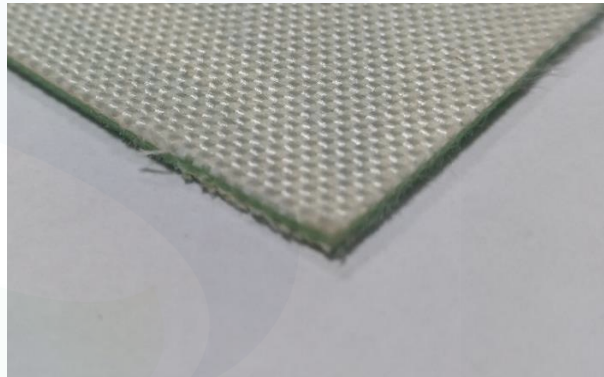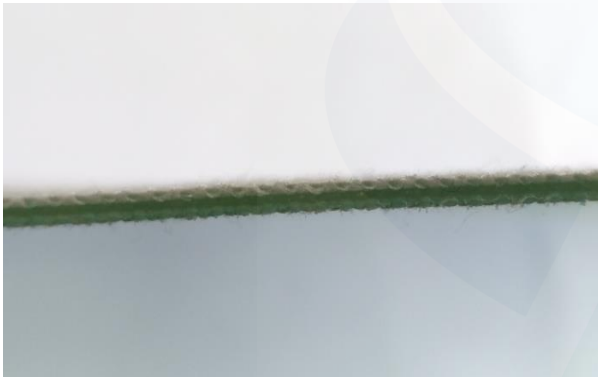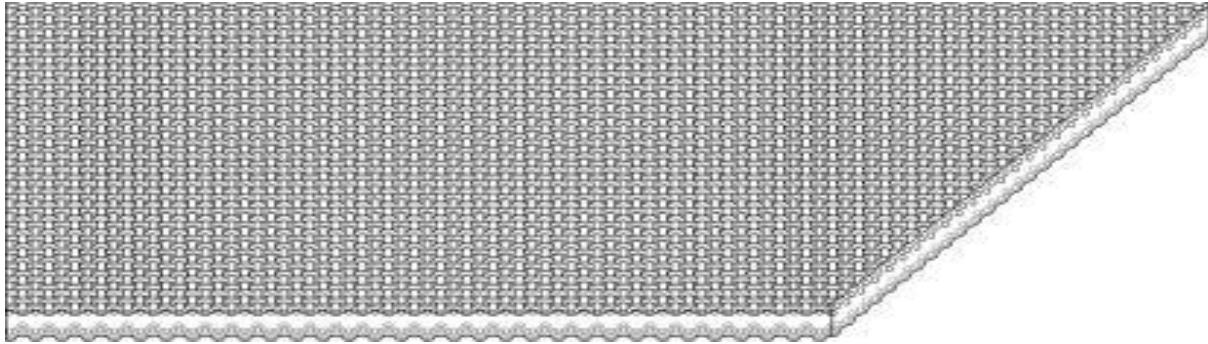

## Joining methods

One finger

## Disclaimer

All data are approximate values and defined under the following standard climatic conditions. 23 °C, 50 % relative humidity (ISO 554).

All informations are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. Due to the fact that Boshun Belting has no control of use, we will not assume any liability concerning the suitability and process ability of the products mentioned herein. This also applies to defects, damages, consequential damages, and other consequences

Issued: 2019.04.26

Last update: 2019.04.26